

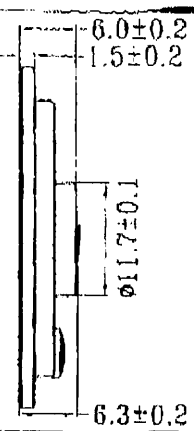
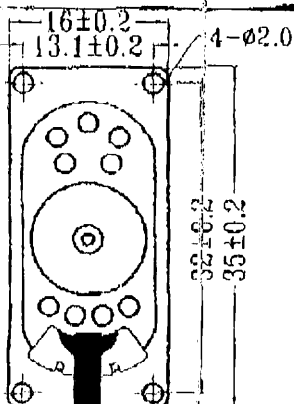


1	MODEL	1635CP08	
2	Dimension	35X16X5.7H	Weight: 4.0 Gram.
3	Magnet	Materials Rare Earth	Size $\phi 8.0 \times \phi 2.0 \times 1.5$ mm.
4	Nominal Impedance	7 Ohm $\pm 15\%$	Al 1000 Hz
5	Power Rating	Normal 1.0 W.	Maximum 2.0 W.
6	Lowest Resonant Frequency	600 $\pm$ 120	Hz
7	Output Sound Pressure Level (S.P.L.)	79 $\pm$ 3 db / 1 Watt 1 Meter.	
		Average at 600,800,1000,1200 Hz	
8	Frequency Range	350~20K	Hz. Average SPL-10 db.
9	Distortion	5 % Maximum At	1000 Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By	2.65 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 2.65 Volts. (RMS) 96 Hrs	
12	Operation Temperature	-25°C ~ +70°C 16 Hours.	
13	Storage Temperature	-40°C ~ +85°C 2 Hours.	
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC	
		Current to the "+" or "Marked" Terminal	
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.	

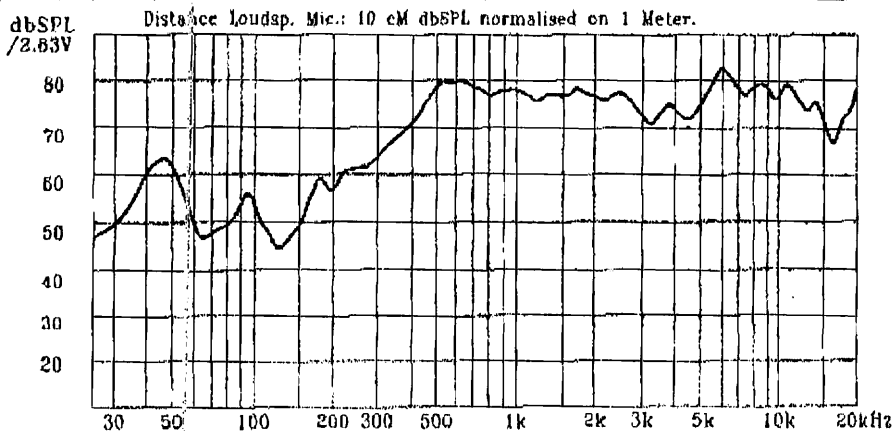

Unit:mm

0003A