
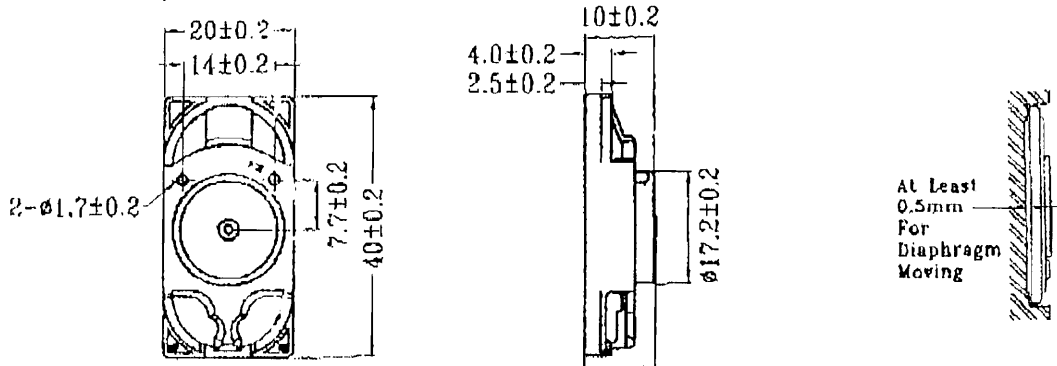


1	MODEL	2040CP08-8		
2	Dimension	20X40X10.3H	Weight	7.0 Gram.
3	Magnet	Materials Rare Earth	Size	ø11.4Xø2.0X1.8 mm.
4	Nominal Impedance	8 Ohm	± 15 %	At 1000 Hz
5	Power Rating	Normal 1.0 W.	Maximum	2.0 W.
6	Lowest Resonant Frequency	510	±	102 Hz
7	Output Sound Pressure Level (S.P.L.)	75 ± 3 db / 1 Watt 1 Meter.		
		Average at 600,800,1000,1200 HZ		
8	Frequency Range	200~20K	Hz	Average SPL-10 db.
9	Distortion	5 %	Maximum At	1000 Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 2.83 Volts Sine Wave.		
11	Load Test	White Noise with Weighted Filter 2.83 Volts. (RMS) 96 Hrs.		
12	Operation Temperature	-25°C ~ +70°C 16 Hours.		
13	Storage Temperature	-40°C ~ +85°C 2 Hours.		
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC Current to the "+" or "Marked" Terminal.		
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.		

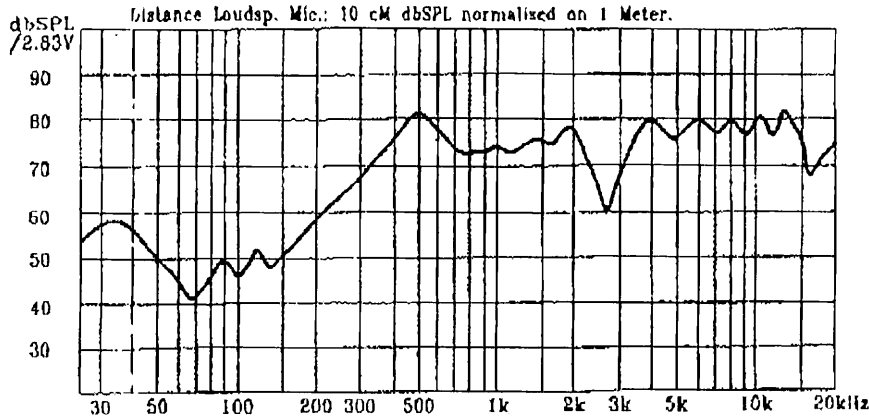

Unit:mm

0103C

We reserve the right to alter specification without notice for further improvement.