




1	MODEL	20CS30MX	16NT1
2	Dimension	Outer Diameter 20 mm Baffle Opening 19.1	Height Refer to drawing Weight 1.7
3	Magnet	Materials Rare Earth Size 28.5 20.8	
4	Nominal Impedance	30 Ohm $\pm 15\%$	Al 1000
5	Power Rating	Normal 60 mW	Maximum 100
6	Lowest Resonant Frequency	253 Hz	60 Hz
7	Output Sound Pressure Level (S.P.L.)	95 $\pm 3$ db / 10 mW 1 cm.	
8	Frequency Range	150~20K Hz	Average SPL-10
9	Distortion	5 % Maximum At 1000 Hz	60
10	Abnormal Sound Test	Must be Normal Tested By 1.34 Volts Sine W	
11	Load Test	White Noise wide Weighted Filter 1.34 Volts. (RMS) 24	
12	Operation Temperature	-25°C ~ +50°C 16 Hours.	
13	Storage Temperature	-40°C ~ +60°C 2 Hours.	
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC Current to the "+" or "Marked" Terminal	

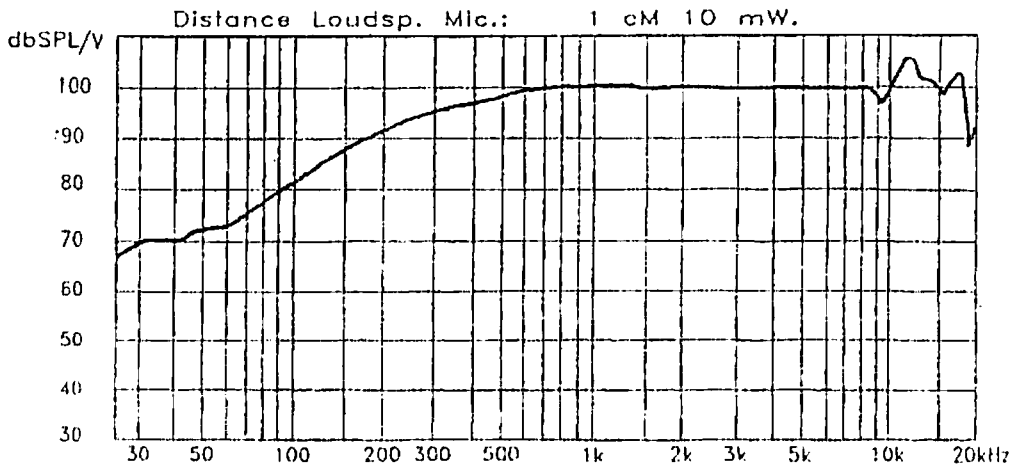

$\phi 20 \pm 0.2$



$3.0 \pm 0.2$



At least  
0.5mm  
for  
Diaphragm  
karing



Unit:mm