
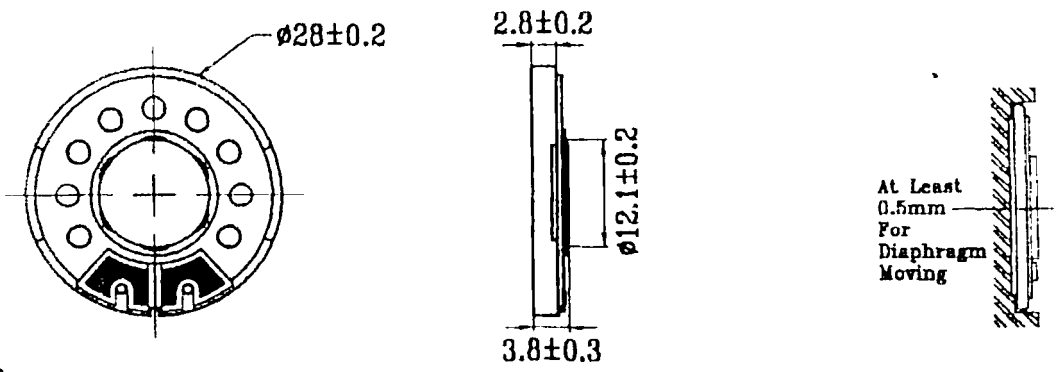


1	MODEL	F28P04B(28CS08P-50ND)			
2	Dimension	Outer Diameter	28 mm	Baffle Opening	26.3 mm.
		Height Refer to drawing	Weight	2.6	Gram.
3	Magnet	Materials	Rare Earth	Size	ø9.5X1.5 mm.
4	Nominal Impedance	8 Ohm	± 15 %	At	1000 Hz
5	Power Rating	Normal	0.1 W.	Maximum	0.2 W.
6	Lowest Resonant Frequency	520	±	104	Hz
7	Output Sound Pressure Level (S.P.L.)	80 ± 3 db / 1 Watt 1 Meter.			
		Average at	600,800,1000,1200		Hz
8	Frequency Range	300~6000	Hz.	Average SPL	-10 db.
9	Distortion	5 %	Maximum At	1000 Hz	0.1 W.
10	Abnormal Sound Test	Must be Normally Tested By		0.89	Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 0.89 Volts. (RMS) 24 Hrs.			
12	Operation Temperature	-25°C ~ +60°C 16 Hours.			
13	Storage Temperature	-40°C ~ +70°C 2 Hours.			
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC			
		Current to the "+" or "Marked" Terminal.			
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.			

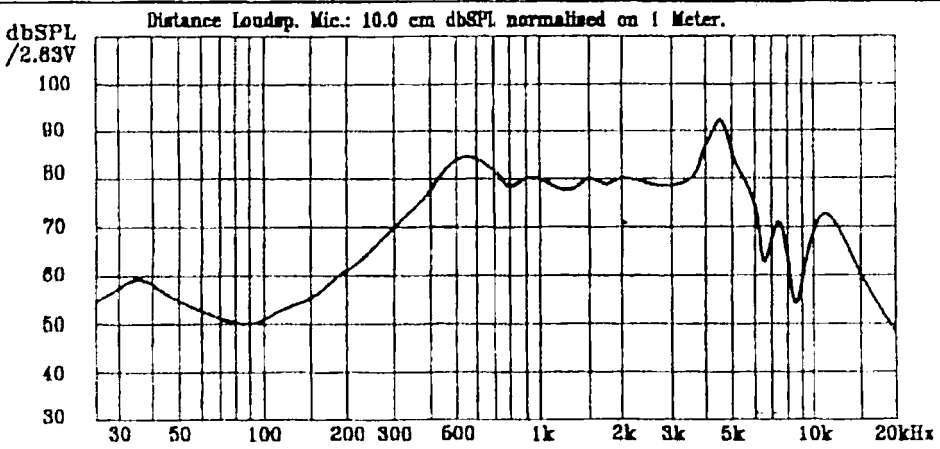

Unit:mm