
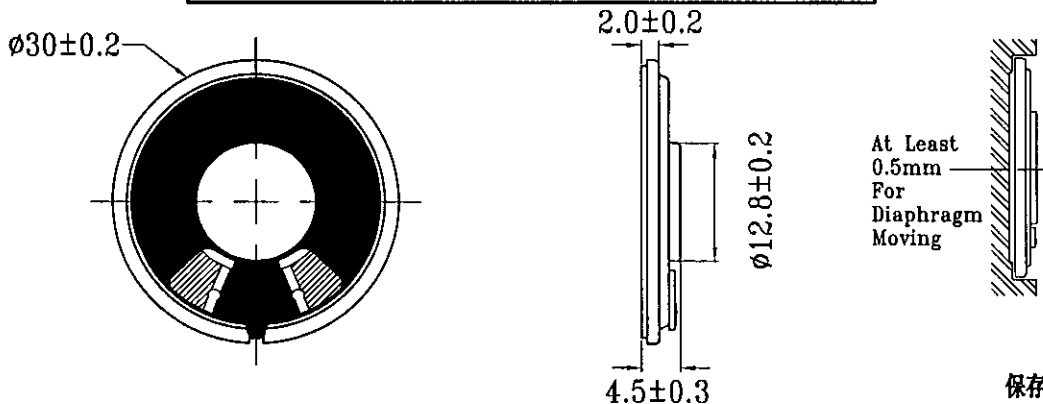


1	MODEL	F30M143A(GP) (30CS04MSX-50BD11)
2	Dimension	Outer Diameter 30 mm Baffle Opening 27.2 mm.
		Height Refer to drawing Weight 5.0 Gram.
3	Magnet	Materials Rare Earth Size $\phi 9.5 \times 1.5$ mm.
4	Nominal Impedance	4 Ohm $\pm 15\%$
5	Power Rating	Normal 0.5 W. Maximum 1.0 W.
6	Lowest Resonant Frequency	500 \pm 100 Hz
7	Output Sound Pressure Level	97 \pm 3 dB / 0.5 Watt 0.1 Meter.
		Average at 600,800,1000,1200 Hz
8	Frequency Range	340~5800 Hz. Average SPL-10 dB.
9	Distortion	5 % Maximum At 1000 Hz 0.5 W.
10	Abnormal Sound Test	Must be Normally Tested By 1.41 Volts Sine Wave.
11	Load Test	Pink Noise with Weighted Filter 1.41 Volts. (RMS) 24 Hrs.
12	Operation Temperature	-25°C ~ +70°C
13	Storage Temperature	-40°C ~ +85°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

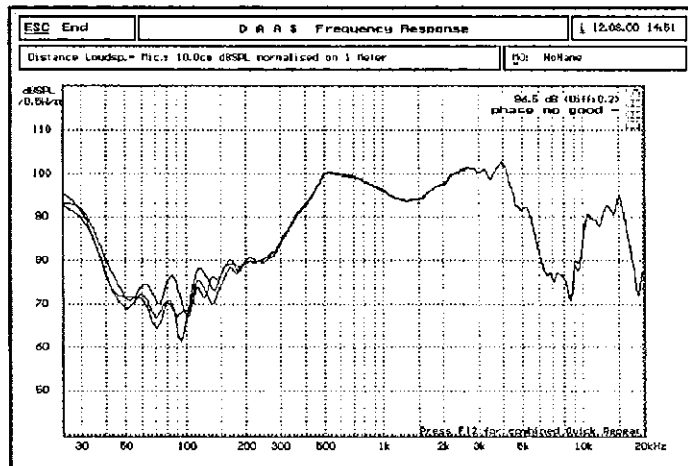

Unit:mm

保存有效期限：一年